

B-cube 3




Professional equipment for preparing gelato creams, cold creams, sorbets, and granitas. Includes a cup presence sensor and display.

Certifications



Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

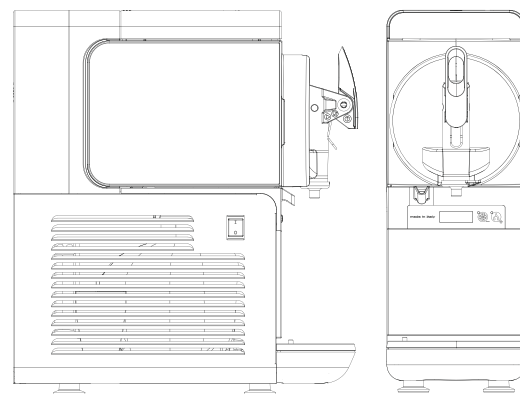

Technical Specifications	B-cube 3.1	B-cube 3.2	B-cube 3.3
Capacity (L)	2,8	5,6	8,4
Height (cm)	49	49	49
Width (cm)	18	37	55
Depth (cm)	44	44	44
Net weight, approx. (Kg)	20	36	52
Gross weight, approx. (Kg)	22	38	54
Power * (W)	300	500	750
Gas (230V 50Hz)	R290	R290	R290
Gas (other voltages)	In compliance with current regulations, one of the following gases will be used: R1234ZE, R454C, R513a.		

* Test conditions: 32°C - 230V 50Hz - 1st hour of operation

Additional Technical Features	Safety and control devices
Shatterproof PETG (Tritan) container - BPA free	Noise level below 70 dB (A)
Painted steel body	R290 gas models: equipped with ATEX electrical components
E-COAT: for energy savings and reduced condensation	Hermetic compressor with protector
POM plastic stirrer	Mechanical product density control
Air-cooled condenser	Electronic product temperature control
Fixed-speed gear reducer	Pre-equipped for tap lock
Mechanical transmission	Easy to disassemble and clean
Lid unlocking button	Day/night function (production/maintenance mode)
	Simple and intuitive control panel

Optional Accessories	
Container/lid unlocking with key	Customizable flavor marker
Product lighting	

MILANO DISPENSERS spa

Via Mario Ugolini, 3 - 27010 Torrevecchia Pia (PV) - Italia - +39 0382 1651 - www.milanodispensers.com - www.brasmilano.com

We reserve the right to make changes without prior notice.

B-cube 6

BRAS[®]


Professional equipment for preparing cold creams, sorbets, and granitas. Available in Easy (mechanical regulation) and ETC (electronic control) versions.

Certifications



Available Voltages

230V 50Hz / 240V 50Hz / 115V 60Hz / 208-220V 60Hz / 100V 50-60Hz

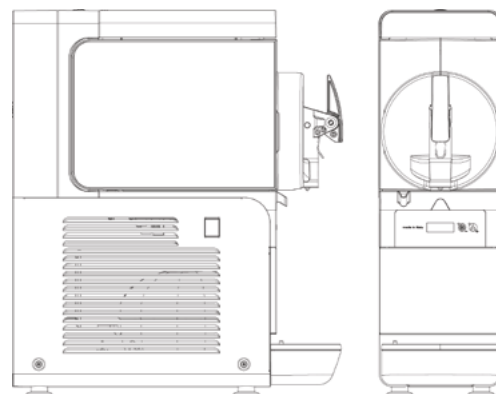

Technical Specifications	B-cube 6.1	B-cube 6.2	B-cube 6.3
Capacity (L)	6	12	18
Height (cm)	60	60	60
Width (cm)	19	39	60
Depth (cm)	52	52	52
Net weight, approx. (Kg)	24	38	50
Gross weight, approx. (Kg)	26	40	52
Power * (W)	350	500	800
Gas (230V 50Hz)	R290	R290	R290
Gas (other voltages)	In compliance with current regulations, one of the following gases will be used: R1234ZE, R454C, R513a.		

* Test conditions: 32°C - 230V 50Hz - 1st hour of operation

Additional Technical Features	Safety and control devices
Shatterproof PETG (Tritan) container - BPA free	Noise level below 70 dB (A)
E-COAT: for energy savings and reduced condensation	R290 gas models: equipped with ATEX electrical components
POM plastic stirrer	Hermetic compressor with protector
Painted steel body	Pre-equipped for tap lock
Air-cooled condenser	Easy to disassemble and clean
Lid unlocking button	Day/night function (production/maintenance mode)
Fixed-speed gear reducer	Intuitive control panel (ETC version)
Patented magnetic transmission	Product temperature control (ETC version)
	Product temperature display (ETC version)
	Product temperature alarm (ETC version)

Optional Accessories
Container/lid unlocking with key
Product lighting
Customizable flavor marker

MILANO DISPENSERS spa

Via Mario Ugolini, 3 - 27010 Torrevecchia Pia (PV) - Italia - +39 0382 1651 - www.milanodispensers.com - www.brasmilano.com

We reserve the right to make changes without prior notice.